

INTERLOCK

SEWING MACHINE SERIES

绷缝机系列



LORDI 乐点

绷缝机系列
Interlock Sewing Machine Series



i500F 平台式步进电脑绷缝机
Flat-bed Step Motor Computerized Interlock Machine



- 1、步进控制倒缝结构，
倒缝无声、安静舒适
Step Motor Controls Back Stitches,
Quiet And Comfortable
Working Condition
- 2、优化剪线装置，剪线更稳定，
避免起缝不上线
Optimize Thread Trimming Device,
Avoid Problem Of Thread
Loosening
- 3、升级供油系统，保障牙架润滑
Upgrade Oil Supply System,
Ensure The Lubrication Of Tooth
Part
- 4、一机多用，快速切换
One Machine Multiple Functions,
Quick Switching

型号 Model	用途 Functions	机针 Needle	针数 Needle No.	线数 Thread No.	压脚高度 Presser Foot Lifting Height	针迹长度 Stitch Length	针迹宽度 Stitch Width	差动比 Differential Ratio	最高转速 Max.speed (rpm)	体积 Meas (cm)	重量 Weight (kg)
i500F	步进款 Step Motor	UY128GAS.11#	3	5	5.5	1.5-4.5	5.6/6.4	0.5-1.3	6000	64×40×63	52/56
i500UT-01GB	基本缝 Plain Seaming	UY128GAS.11#	3	5	5.5	1.5-4.4	5.6/6.4	0.5-1.3	6000	64×40×63	50/35
i500UT-02BB	滚领缝 Tape Binding	UY128GAS.11#	3	5	5.5	1.5-4.4	5.6/6.4	0.5-1.3	6000	64×40×63	50/35
i500UT-08AC	下摆折边 Bottom Hemming	UY128GAS.11#	3	5	5.5	1.5-4.4	5.6/6.4	0.5-1.3	6000	64×40×63	50/35
i500D-01GB	基本缝 Plain Seaming	UY128GAS.11#	3	5	5.5	1.5-4.4	5.6/6.4	0.5-1.3	5500	63×40.5×63.5	49/52
i500D-03GB	盖缝 Cover Seaming	UY128GAS.11#	3	5	5.5	1.5-4.4	5.6/6.4	0.5-1.3	5500	63×40.5×63.5	49/52
i500D-02BB	滚领缝 Tape Binding	UY128GAS.11#	3	5	5.5	1.5-4.4	5.6/6.4	0.5-1.3	5500	63×40.5×63.5	49/52
i500D-08AC	下摆折边 Bottom Hemming	UY128GAS.11#	3	5	5.5	1.5-4.4	5.6/6.4	0.5-1.3	5500	63×40.5×63.5	49/52
i500D-05CB	缝松紧带(右刀) Elastic Case Attaching (Right Side Cutter)	UY128GAS.11#	3	5	5.5	1.5-4.4	5.6/6.4	0.5-1.3	5500	63×40.5×63.5	49/52

注：D代表直驱；UT代表电动剪线；UTL代表气动剪线；EWT代表摆梭线；EST代表面剪；
Note: D Means Direct Drive; EWT Means Whipper; EST Means Upper Thread Trimmer; UT Means Electric Trimmer; UTL Means Pneumatic Trimmer



i600F

小方头步进电脑绷缝机
High Speed Step Motor Computerized Cylinder-bed Interlock Machine



- 1、步进控制倒缝结构，
倒缝无声、安静舒适
Step Motor Controls Back
Stitches,
Quiet And Comfortable
Working Condition
- 2、优化剪线机构，
高耐磨刀片，剪线更稳定
Optimized Trimming Device,
High Wear-resistant Blade,
Stable Trimming
- 3、小方头设计，适用性更广
Small Square Head Design,
Wider Applicability
- 4、改进防漏结构，杜绝漏油，良品率高
Improved Leak-proof
Structure, No Oil Leakage,
High Yield

型号 Model	用途 Functions	机针 Needle	针数 Needle No.	线数 Thread No.	压脚高度 Presser Foot Lifting Height	针迹长度 Stitch Length	针迹宽度 Stitch Width	差动比 Differential Ratio	最高转速 Max.speed [rpm]	体积 Meas (cm)	重量 Weight (Kg)
i600F	步进款 Step Motor	UY128GAS.10-14#	3	5	5.5	1.5-4.4	5.6/6.4	0.8-1.3	6000	64×40×63	50/56
i600UT-01GB	基本缝 Plain Seaming	UY128GAS.11#	3	5	5.5	1.5-4.4	5.6/6.4	0.5-1.3	6000	64×40×63	50/56
i600UT-02BB	滚边缝 Tape Binding	UY128GAS.11#	3	5	5.5	1.5-4.4	5.6/6.4	0.5-1.3	6000	64×40×63	50/56
i600UT-35AC	下摆折边(左切刀) Bottom Hemming (Left Knife)	UY128GAS.11#	3	5	5.5	1.5-4.4	5.6/6.4	0.5-1.3	6000	64×40×63	50/56
i600D-01GB	基本缝 Plain Seaming	UY128GAS.11#	3	5	5.5	1.5-4.4	5.6/6.4	0.5-1.3	5500	58×38×63	40/48
i600D-02BB	滚边缝 Tape Binding	UY128GAS.11#	3	5	5.5	1.5-4.4	5.6/6.4	0.5-1.3	5500	58×38×63	40/48
i600D-35AC	下摆折边(左切刀) Bottom Hemming (Left Knife)	UY128GAS.11#	3	5	5.5	1.5-4.4	5.6/6.4	0.5-1.3	5500	58×38×63	40/48

注：D代表直驱；UT代表电动剪线；UTL代表气动剪线；EWT代表擦线器；EST代表面剪
Note: D Means Direct Drive; EWT Means Whipper; EST Means Upper Thread Trimmer; UT Means Electric Trimmer; UTL Means Pneumatic Trimmer



i787UT

横筒型电脑绷缝机
Horizontal Tube Type Computerized Interlock Sewing Machine



- 1、标配进口Unitta同步带，
寿命更长
Standard Imported Unitta
Synchronous Belt For Longer
Lifetime
- 2、采用密封式侧盖，
彻底解决漏油问题
Using A Sealed Side Cover To
Completely Solve The Problem
Of Oil Leakage
- 3、全部挡片机构，精准送料，
效率更高，不易切破布，操作更简单
All Blocking Mechanisms,
Precise Feeding, Higher
Efficiency, Prevent From Cutting
Fabric, And Simpler Operation
- 4、720独立差动结构，
轻松应对各种面料
720 Independent Differential
Feeding Structure, Suitable
For Various Fabrics

型号 Model	机针 Needle	针数 Needle No.	线数 Thread No.	压脚高度 Presser Foot Lifting Height	针迹长度 Stitch Length	针迹宽度 Stitch Width	差动比 Differential Ratio	最高转速 Max.speed (rpm)	体积 Meas (cm)	重量 Weight (Kg)
i787D-356	UY128GAS.9-16#	3	5	7	1.5-4.5	5.6	0.6-1.3	5500	71×39×64	52/58
i787D-364	UY128GAS.9-16#	3	5	7	1.5-4.5	6.4	0.6-1.3	5500	71×39×64	52/58
i787UT-356-EST	UY128GAS.9-16#	3	5	7	1.5-4.5	5.6	0.6-1.3	6000	71×39×64	52/58
i787UT-356-EWT	UY128GAS.9-16#	3	5	7	1.5-4.5	5.6	0.6-1.3	6000	71×39×64	52/58
i787UTL-364-EST	UY128GAS.9-16#	3	5	7	1.5-4.5	6.4	0.6-1.3	6000	71×39×64	52/58
i787UTL-364-EST	UY128GAS.9-16#	3	5	7	1.5-4.5	6.4	0.6-1.3	6000	71×39×64	52/58
i720UT-356-EST	UY128GAS.9-16#	3	5	7	1.5-4.5	5.6	0.6-1.3	6000	71×39×64	52/58
i720UT-356-EWT	UY128GAS.9-16#	3	5	7	1.5-4.5	5.6	0.6-1.3	6000	71×39×64	52/58
i720UT-364-EWT	UY128GAS.9-16#	3	5	7	1.5-4.5	6.4	0.6-1.3	6000	71×39×64	52/58
i720UTL-356-EWT	UY128GAS.9-16#	3	5	7	1.5-4.5	5.6	0.6-1.3	6000	71×39×64	52/58
i720UTL-364-EST	UY128GAS.9-16#	3	5	7	1.5-4.5	6.4	0.6-1.3	6000	71×39×64	52/58

注：D代表直驱；UT代表电动剪线；UTL代表气动剪线；EWT代表擦线器；EST代表面剪
Note: D Means Direct Drive; EWT Means Whipper; EST Means Upper Thread Trimmer; UT Means Electric Trimmer; UTL Means Pneumatic Trimmer



i1500UT


高速筒式绷缝机
High Speed Cylinder Type Stretch Sewing Machine



- 1、全封闭自动供油，清洁环保
Fully Enclosed Automatic Oil Supply, Clean Working Condition
- 2、适应不同缝制需求，一机多用
Adapt To Different Sewing Needs, With Multiple Uses For One Machine
- 3、直驱一体，节能高效
Direct Drive Integrated Design, Energy-saving And Efficient
- 4、自动剪线、自动抬压脚，省时省力更高效
Automatic Trimming And Automatic Pressure Foot Lifting, Saving Time, Effort, And Increasing Efficiency


型号 Model	机针 Needle	针数 Needle No.	线数 Thread No.	自动剪线 Auto Trimmer	针距 Needle Gauge	压脚高度 Presser Foot Lifting Height	针迹宽度 Stitch Width	针杆行程 Beedle Bar Stroke	差动比 Differential Ratio	最高转速 Max. speed (rpm)	体积 Meas (cm)	重量 Weight (kg)
i1500UT-156	UY128GAS.9-16#	3	5	√	5.6	9	1.2-4	31.5	1:0.8-1:2	5000	58×50×65	52.5/63.5
i1500UTL-156	UY128GAS.9-16#	3	5	√	5.6	9	1.2-4	31.5	1:0.8-1:2	5000	58×50×65	49/60
i1500LUT-156	UY128GAS.9-16#	3	5	√	5.6	9	1.2-4	31.5	1:0.8-1:2	5000	71.5×53.5×67	55/66.5
i1500LUTL-156	UY128GAS.9-16#	3	5	√	5.6	9	1.2-4	31.5	1:0.8-1:2	5000	71.5×53.5×67	52/63.5
i1500D-156	UY128GAS.9-16#	3	5	/	5.6	9	1.2-4	31.5	1:0.8-1:2	5000	58×50×65	54.2/40.2
i1500LD-156	UY128GAS.9-16#	3	5	/	5.6	9	1.2-4	31.5	1:0.8-1:2	5000	71.5×53.5×67	57/45.5
i1502D-156	UY128GAS.9-16#	2	4	/	5.6	9	1.2-4	31.5	1:0.8-1:2	5000	58×50×65	56/42

注:默认标准款;L代表加长款;D代表直驱;EWT代表摆线器;EST代表直驱;UT代表电动剪线;UTL代表气动剪线;L代表加长款(37cm);L45代表加长款(45cm)
Note: Default Standard Model; L: Extended Cylinder Bed Model; D Means Direct Drive; EWT Means Whipper; EST Means Upper Thread Trimmer; UT Means Electric Trimmer; UTL Means Pneumatic Trimmer
L Means Extended 37cm; L45 Means Extended 45cm

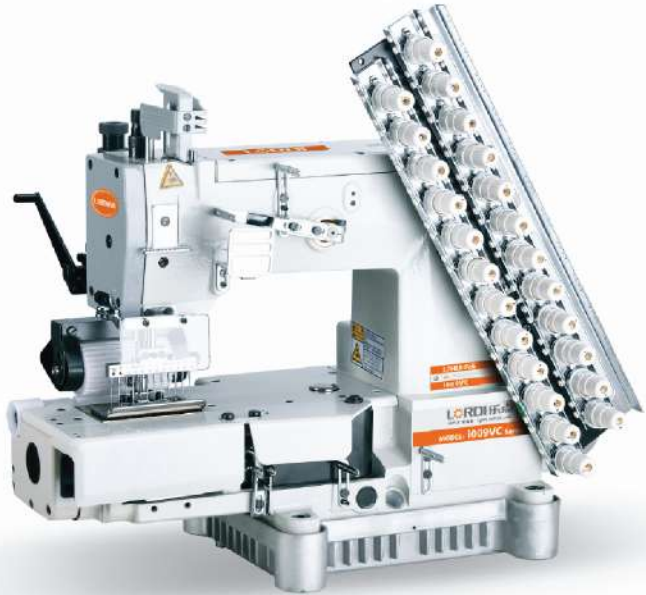

i009VC

高速电脑多针机
High Speed Computerized Multi-needle Machine

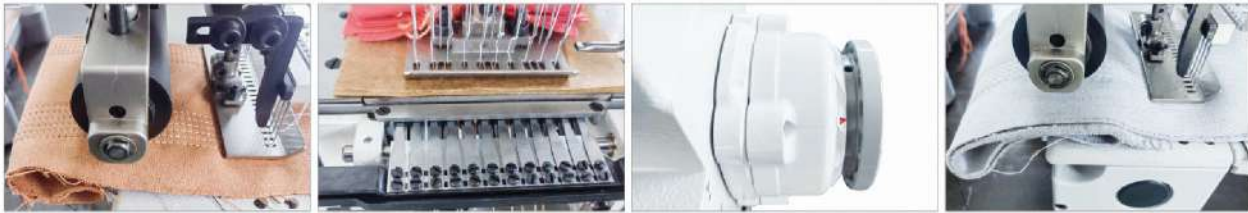

- 1、适应不同缝制需求，一机多用
Adapt To Different Sewing Needs, With Multiple Uses For One Machine
- 2、自动剪线、自动抬压脚，省时省力更高效
Automatic Trimming, And Automatic Pressure Foot Lifting, Saving Time, Effort, And Increasing Efficiency
- 3、机电一体，节能高效
Integrated Design, Energy-saving And Efficient
- 4、面料适应性广，吃厚能力强
Wide Adaptability Of Fabrics And Strong Adaptability For Heavy Materials

型号 Model	机针 Needle	针数 Needle No.	线数 Thread No.	针迹长度 Stitch Length	压脚高度 Presser Foot Lifting Height	针迹宽度 Stitch Width	最高转速 Max. speed (rpm)	体积 Meas (cm)	重量 Weight (kg)
i009VCUT-04064P/04080P/04085P/04095P	UO113-14-16#	4	8	1.7-4.0	8	6.4/7.9/8.7/9.5	3500	62×40×60	55/60
i009VCUT-06048P/06064P/06080P/06095P	UO113-14-16#	6	12	1.7-4.0	8	6.4/7.9/9.5	3500	62×40×60	55/60
i009VCUT-08064P/08085P	UO113-14-16#	8	16	1.7-4.0	8	6.4/8.7	3500	62×40×60	55/60
i009VCUT-12064P	UO113-14-16#	12	24	1.7-4.0	8	6.4	3500	62×40×60	55/60
i009VCUT-13064-32P	UO113-14-16#	13	26	1.7-4.0	8	6.4	3500	62×40×60	55/60
i009VCD-04064P/04080P/04085P/04095P	UO113-14-16#	4	8	1.7-4.0	8	6.4/7.9/8.7/9.5	3500	62×40×60	50/55
i009VCD-06048P/06064P/06080P/06095P	UO113-14-16#	6	12	1.7-4.0	8	4.8/6.4/7.9/9.5	3500	62×40×60	50/55
i009VCD-08032P/08048P/08064P/08085P	UO113-14-16#	8	16	1.7-4.0	8	3.2/4.8/6.4/8.7	3500	62×40×60	50/55
i009VCD-12032P/12048P/12064P	UO113-14-16#	12	24	1.7-4.0	8	3.2/4.8/6.4	3500	62×40×60	46/56
i009VCD-13064-P	UO113-14-16#	13	26	1.7-4.0	8	6.4-3.2	3500	62×40×60	48/32
i009VCD-17032P	UO113-14-16#	17	34	1.7-4.0	8	3.2	3500	62×40×60	50/55
i009VCD-23032P	UO113-14-16#	23	46	1.7-4.0	8	3.2	3500	62×40×60	50/55
i009VCD-25032P	UO113-14-16#	25	50	1.7-4.0	8	3.2	3500	62×40×60	50/55

注 (Note): 1、UT代表电动剪线, UTL代表气动剪线 2、可选附加装置: P (垫块拖轮)、PR (光滑拖轮)、VWL (碎头车缝)、VPL (上带车缝)、VSF (门襟车缝)、VPQ (松紧带抽绳)、VCQ (压线带抽绳)
Note: 1. UT Means Electric Trimming, UTL Means Pneumatic Trimming; 2. Optional Additional Device: P (Dentiform Puller), PR (Smooth Puller), VWL (Front Elastic Feeding Device), VPL (Tape Attaching Sewing), VSF (Placket Sewing), VPQ (Elastic Wrinkled Sewing), VCQ (Line Wrinkled Sewing)