

OVERLOCK

SEWING MACHINE

SERIES

包缝机系列



LORDI 乐点

包缝机系列
Overlock Sewing Machine Series



O20

智能步进超高速包缝机
Intelligent Super High Speed Overlock Machine With Stepping Motor



1、薄厚面料，一秒调整
Light And Heavy Fabric,
Adjustable In One Second



2、蓝牙互联，手机操作
Bluetooth Interconnection,
Mobile Operation



3、自动计件
Automatic Counting



4、步进电机驱动，
控制抬压脚及剪线，效率更高
Step Motor Controls Presser
Foot Lifter And Trimmer,
More Efficient

型号 Model	用途 Functions	机针 Needle	针数 Needle No.	线数 Thread No.	压脚高度 Presser Foot Lifting Height(mm)	针间距 Needle Distance(mm)	针迹长度 Stitch Length(mm)	针迹宽度 Stitch Width(mm)	差动比 Differential Ratio	最高转速 Max.speed (rpm)	体积 Meas. (cm)	重量 Weight (Kg)
O20-3-02/333	基本缝 Plain Seaming	DC×111#	1	3	5	2	0.8-4.2	4	0.7-2	7000	48×36×53	32/40
O20-3-32R2/223	密缝缝 Narrow Seaming	DC×111#	1	3	5	-	0.8	1.5	0.7-2	7000	48×36×53	32/40
O20-4-M03/333	基本缝 Plain Seaming	DC×111#	2	4	6	2	0.8-4.6	2×4	0.7-2	7000	48×36×53	32/40
O20-4-M03/333/H/M	厚料 Heavy Duty	DC×116#	2	4	6	2	0.8-4.6	2×4	0.7-2	7000	48×36×53	32/40
O20-5-53/233	包条缝 Stitch	DC×114#	2	5	5	3	0.8-4.2	3×5	0.7-2	7000	48×36×53	32/40
O20-5-03/233	5x5 Stitch	DC×114#	2	5	5	5	0.8-4.2	5×5	0.7-2	7000	48×36×53	32/40
O20-5-03/333	3x4 Stitch	DC×114#	2	5	5	3	0.8-4.2	3×4	0.7-2	7000	48×36×53	32/40
O20-5-04/435	极厚料 Extra heavy	DC×119#	2	5	7	5	0.8-5	5×6	0.8-1.5	7000	48×36×53	32/40

注：选配X(吸风管剪线刀)；选配SD(前后气吸装置)
Note: Optional X(Suction Pipe Cutter) ; Optional SD(Front And Rear Air Suction Device)



O5 超高速直驱包缝机
Super High Speed Direct-drive Overlock Machine



- 1、伺服电机控制主轴，启停响应快
Servo Motor Controls Main Shaft, Start And Stop Response Fastly.
- 2、一键还原，操作简单
One Key Reset, Easy Operate
- 3、针杆全包式防油，清洁缝纫
Needle Bar All-inclusive Oil-proof Desgin, Clean Sewing
- 4、超高速，效率高，噪音低
Super High Speed, High Efficiency, Low Noise

型号 Model	用途 Functions	机针 Needle	针数 Needle No.	线数 Thread No.	压脚高度 Presser Foot Lifting Height(mm)	针间距 Needle Distance(mm)	针迹长度 Stitch Length(mm)	针迹宽度 Stitch Width(mm)	差动比 Differential Ratio	最高转速 Max.speed (rpm)	体积 Meas (cm)	重量 Weight (Kg)
O5-02X250	包边缝 Pocket Binding	DC×1 11#	2	4	3.5	5	0.8-4.2	5	0.7-2	7000	47×36×53.5	31/38
O5-3-02/333	基本缝 Plain Seaming	DC×1 11#	1	3	5	2	0.8-4.2	4	0.7-2	7000	47×36×53.5	31/38
O5-3-32R2/223	密接缝 Narrow Sewing	DC×1 11#	1	3	5	-	0.8	1.5	0.7-2	7000	47×36×53.5	31/38
O5-4-M03/333	基本缝 Plain Seaming	DC×1 11#	2	4	6	2	0.8-4.6	2×4	0.7-2	7000	47×36×53.5	31/38
O5-4-M03/333/H/M	厚料 Heavy Duty	DC×1 16#	2	4	6	2	0.8-4.6	2×4	0.7-2	7000	47×36×53.5	31/38
O5-4-53/233	毛巾机 Sotch	DC×1 14#	2	5	5	3	0.8-4.2	3×5	0.7-2	7000	47×36×53.5	31/38
O5-5-03/233	5x5 Stitch	DC×1 14#	2	5	5	5	0.8-4.2	5×5	0.7-2	7000	47×36×53.5	31/38
O5-5-03/333	3x4 Stitch	DC×1 14#	2	5	5	3	0.8-4.2	3×4	0.7-2	7000	47×36×53.5	31/38
O5-5-04/435	极厚料 Extra Heavy	DC×1 19#	2	5	7	5	0.8-5	5×6	0.8-1.5	7000	47×36×53.5	31/38



O2 高速直驱包缝机
High Speed Direct-drive Overlock Machine




- 1、直驱一体，节能高效
Integrated Direct Drive Design, Energy Saving And High Efficiency
- 2、大风力手轮，散热更快
Big Fan Hand Wheel, Better Cooling Effect
- 3、整机结构升级，噪音低，震动小
Upgarde Machine Structure, Low Noise And Vibration
- 4、优化传动结构，吃厚能力强
Optimize Transmission Structure, Strong Ability For Heavy Duty

型号 Model	用途 Functions	机针 Needle	针数 Needle No.	线数 Thread No.	压脚高度 Presser Foot Lifting Height(mm)	针间距 Needle Distance(mm)	针迹长度 Stitch Length(mm)	针迹宽度 Stitch Width(mm)	差动比 Differential Ratio	最高转速 Max.speed (rpm)	体积 Meas (cm)	重量 Weight (Kg)
O2-3-02/333	基本缝 Plain Seaming	DC×1 11#	1	3	5	2	0.8-4.2	4	0.7-2	5500	47×36×53.5	28/35
O2-3-32R2/223	密接缝 Narrow Sewing	DC×1 11#	1	3	5	-	0.8-4.2	1.5	0.7-2	5500	47×36×53.5	28/35
O2-4-M03/333	基本缝 Plain Seaming	DC×1 11#	2	4	6	2	0.8-4.6	2X4	0.7-2	5500	47×36×53.5	28/35
O2-4-M03/333/H/M	厚料 Heavy Duty	DC×1 16#	2	4	6	2	0.8-4.6	2X4	0.7-2	5500	47×36×53.5	28/35
O2-5-53/233	包边缝 Stotch	DC×1 14#	2	5	5	3	0.8-4.2	3X5	0.7-2	5500	47×36×53.5	28/35
O2-5-03/233	5x5 Stitch	DC×1 14#	2	5	5	5	0.8-4.2	5X5	0.7-2	5500	47×36×53.5	28/35
O2-5-03/333	3x4 Stitch	DC×1 14#	2	5	5	3	0.8-4.2	3X4	0.7-2	5500	47×36×53.5	28/35
O2-5-04/435	极厚料 Extra Heavy	DC×1 19#	2	5	7	5	0.8-5	5X6	0.8-1.5	5500	47×36×53.5	28/35



O5214TE

电脑上下差动包缝机
Computerized Top And Bottom Differential Feeding Overlock Machine

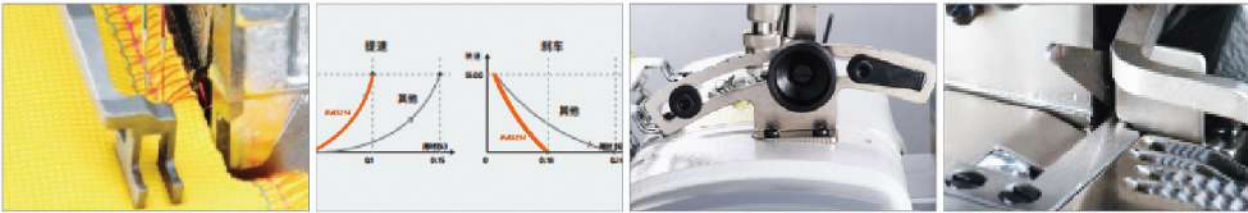

- 1、顺滑送布、适应广泛
Fabric Feeding Smoothly, Adapt Widely
- 2、超快启停、反应灵敏
Super Fast Start And Stop, Response Fastly
- 3、上下差动、送料超强
Top And Bottom Differential Feeding, Strong For Feeding Fabric
- 4、精准剪线、防切布
Precise Trimming, Avoid Of Cutting Fabric

型号 Model	用途 Functions	机针 Needle	针数 Needle No.	线数 Thread No.	压脚高度 Presser Foot Lifting Height(mm)	针间距 Needle Distance(mm)	针迹长度 Stitch Length(mm)	针迹宽度 Stitch Width(mm)	差动比 Differential Ratio	最高转速 Max.speed (rpm)	体积 Meas (cm)	重量 Weight (Kg)
O5214TD-4-M04/435	极厚料 Extra Heavy	DC×119#	2	4	5.5	2	0.8-4.6	2×4	0.7-1.7	5500	48×35.5×54	32/39
O5214TD-4-M03/333	基本缝 Plain Seaming	DC×114#	2	4	5.5	2	0.8-4.6	2×4	0.7-1.7	5500	48×35.5×54	32/39
O5214TD-5-03/233	5x5 Stitch	DC×114#	2	5	5.5	5	0.8-4.2	5×5	0.7-1.7	5500	48×35.5×54	32/39
O5214TD-5-03/333	3x4 Stitch	DC×114#	2	5	5.5	3	0.8-4.2	3×4	0.7-1.7	5500	48×35.5×54	32/39
O5214TD-5-M04/435	极厚料 Extra Heavy	DC×119#	2	5	5.5	5	0.8-5	5×6	0.7-1.7	5500	48×35.5×54	32/39
O5214TE-4-M04/435	极厚料 Extra Heavy	DC×119#	2	4	5.5	2	0.8-5	5×6	0.7-1.7	7000	47×35.5×52.5	33/41
O5214TE-4-M03/333	基本缝 Plain Seaming	DC×114#	2	4	5.5	2	0.8-4.6	2×4	0.7-1.7	7000	47×35.5×52.5	33/41
O5214TE-5-03/233	5x5 Stitch	DC×114#	2	5	5.5	5	0.8-4.2	5×5	0.7-1.7	7000	47×35.5×52.5	33/41
O5214TE-5-03/333	3x4 Stitch	DC×114#	2	5	5.5	3	0.8-4.2	3×4	0.7-1.7	7000	47×35.5×52.5	33/41
O5214TE-5-04/435	极厚料 Extra Heavy	DC×119#	2	5	5.5	5	0.8-5	5×6	0.7-1.7	7000	47×35.5×52.5	33/41

注：D代表直驱；E代表电脑；M代表厚料
Note: D: Direct Drive; E: Computerized ; M: Heavy Duty



O5100TD

直驱上下差动筒式包缝机
Direct-drive Small Cylinder-bed Variable Top Feed Overlock Machine



- 1、细嘴148mm
Small Cylinder Bed 148mm
- 2、差动送料，不错位
Differential Feeding, Materials Keeps Flat During Sewing
- 3、针距调节、高效便捷
Adjustable Stitch Length, Efficient And Convenient
- 4、直驱式设计，速度更快
Direct-drive Design, Faster Speed

型号 Model	用途 Functions	机针 Needle	针数 Needle No.	线数 Thread No.	压脚高度 Presser Foot Lifting Height(mm)	针间距 Needle Distance(mm)	针迹长度 Stitch Length(mm)	针迹宽度 Stitch Width(mm)	差动比 Differential Ratio	最高转速 Max.speed (rpm)	体积 Meas (cm)	重量 Weight (Kg)
O5100TD-4-M03/333	基本缝 Basic Sewing	DC×114#	2	4	5.5	2	0.8-4.6	2×4	0.7-2	6500	48×35.5×54	28.6/36.5
O5100TD-4-M03/333/FR01	气动撑开 Pneumatic Distraction	DC×114#	2	4	5.5	2	0.8-4.6	2×4	0.7-2	6500	48×35.5×54	28.6/36.5
O5100TD-4-M03/333/FR02	机械撑开 Mechanic Distraction	DC×114#	2	4	5.5	2	0.8-4.6	2×4	0.7-2	6500	48×35.5×54	28.6/36.5
O5100TD-4-M03/333/KS	吸风剪线 Side Suction Trimming	DC×114#	2	4	5.5	2	0.8-4.6	2×4	0.7-2	6500	48×35.5×54	28.6/36.5
O5100TD-4-M03/333/KS/FR01	气动撑开、吸风剪线 Pneumatic Distraction, Suction And Trimming	DC×114#	2	4	5.5	2	0.8-4.6	2×4	0.7-2	6500	48×35.5×54	28.6/36.5
O5100TD-4-M03/333/KS/FR02	机械撑开、吸风剪线 Mechanic Distraction, Suction And Trimming	DC×114#	2	4	5.5	2	0.8-4.6	2×4	0.7-2	6500	48×35.5×54	28.6/36.5
O5100TD-4-M03/333/KS/FR09	全自动上料、吸风剪线 Full Auto Feeding, Suction And Trimming	DC×114#	2	4	5.5	2	0.8-4.6	2×4	0.7-2	6500	48×35.5×54	28.6/36.5

注：KS代表制吸剪线；FR01代表松紧带气动撑开装置；FR02代表松紧带机械撑开装置；FR09代表气动撑开装置，自动上料，自动对位（电眼跟）
Note: KS Means Side Suction Trimming; FR01 Means Pneumatic Distraction Device; FR02 Means Mechanic Distraction; FR09 Means Pneumatic Distraction Auto-Feeding, Auto-Positioning Device